



## Estimate / Order Cover Page

Date: \_\_\_\_/\_\_\_\_/\_\_\_\_

From:

Fax to Special-Lite, Inc.: (800) 423-7610

Pages including this one: \_\_\_\_\_

Estimate

Purchase Order: Your PO#: \_\_\_\_\_ Signature: \_\_\_\_\_

- This job was estimated by Special-Lite. Please provide E#: \_\_\_\_\_
- This job was estimated with the Satellite estimating program. Include Satellite estimate with P.O.
- This job was estimated with the field price book

Special-Lite to provide Submission Drawings at additional cost

Contact: \_\_\_\_\_

Company: \_\_\_\_\_ Email: \_\_\_\_\_

Phone #: \_\_\_\_\_ Fax #: \_\_\_\_\_

Bill To: \_\_\_\_\_ Cell #: \_\_\_\_\_

Ship To: \_\_\_\_\_

\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_  
\_\_\_\_\_

**Freight:**

- Prepaid and added to invoice (Default)
- Collect (not available if shipped to job site)
- Third Party (bill to address on file with S-L)
- Customer Pickup

All Product is shipped  
F.O.B. Decatur, MI

Use Ship To address on file with S-L

Please indicate when material is needed.

Date required for shipment: \_\_\_\_/\_\_\_\_/\_\_\_\_

Job Name: \_\_\_\_\_ Job Location Address: \_\_\_\_\_

Job Site Telephone #: \_\_\_\_\_

Job Site Contact Name: \_\_\_\_\_

Owner: \_\_\_\_\_


Architect: \_\_\_\_\_

# Special-Lite

## SL-17 Estimate/Order Form Instructions

The numbers on this step-by-step guide correspond to the sections on the order form. **Fax form to Special-Lite at (800) 423-7610.**

- 1 Door Mark:** Provide your door marking for labeling. The door mark will be labeled on doors, frames, and shipping boxes.
- 2 Quantity:** Specify the quantity of single doors or the quantity of pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.
- 3 Aluminum Finish:** Aluminum finish selected here will apply to doors, frames and aluminum vision kits. Our standard finishes are clear, dark bronze, and black anodizing. For painted material, send paint sample and furnish paint identification numbers. Choosing one of our established paint colors will result in faster turnaround and lower costs. Special anodizing or painting will result in additional lead time.
- 4 Face Sheet Material/Color:** Choose the desired face sheets from the supplied list. Face sheet options include SpecLite3<sup>®</sup> pebblegrain FRP or paintable pebblegrain face sheets. SpecLite3<sup>®</sup> FRP face sheet options include both the standard and classic color selections. For painted face sheet material choose one of our 20 established paint colors for faster turnaround and lower cost.
- 5 Frames by Special-Lite:** Choose the desired frame from the list of choices. Please include a separate elevation for any frames more complicated than a perimeter frame. Be sure to specify thickness of glass or panels in side lites or transoms. When using 1030 Insert Frame with capping, please sketch frame detail for capping configuration. Special-Lite does not supply glass for framing. We will fax glass sizes.
- 6 Hardware:** Indicate any hardware item (and manufacturer) that Special-Lite will be providing, installing, or prepping for. Be sure to indicate if we are providing each item, or if it will be sent to us. Attach hardware schedule when possible. We do not prep for surface-mounted closers. Wire pulls, push bars, flat hardware, concealed vertical rod exit devices, and some continuous hinges must be sent to our factory if we are to prep for them. Otherwise they must be prepped in the field.
- 7 Vision Lite:** Choose from the following vision lites, or specify a different size in the Special Instructions.

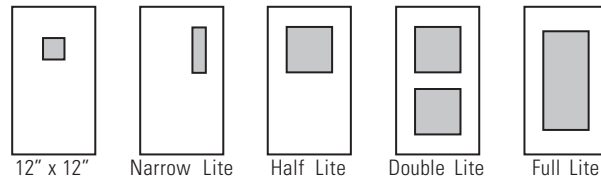

- 8 Glass/Louvers for Doors :** Indicate if glass is by Special-Lite for factory installation, or by others for field installation. We will fax glass sizes to you for glass by others.
- 9 Opening Dimensions:** Select "Door Opening" if you are using an existing frame, a frame by others, or 1030 Insert Frame. Door Opening height is measured from finished floor to the underside of the header. Do not measure to the top of an existing threshold. Door opening width is measured from inside of door jamb to inside of jamb. Select "Frame Size" or "Rough Opening" when using Special-Lite tubular frames. Frame size is measured from outside tip to tip of the new frame. Rough Opening is measured from masonry to masonry. Indicate threshold height — default bottom undercut is 3/4".
- 10 Swing:** Indicate the proper swing of door. The top row consists of inswing doors. The bottom row consists of outswing doors. For pairs of doors, indicate the active leaf by checking the correct box. The default for active leaf is RHR for outswing doors and LH for inswing doors.

**Special Instructions:** No form could accommodate all of Special-Lite's options, but we have worked to create a form that will handle most situations. Use the Special Instructions area, or include a separate sheet to indicate any needs not addressed in the rest of the form.

### Other Flush Door Notes:

- Surface closers and surface holder/stops are field prepped and installed.
- When specifying panels, be sure to indicate 1/4" or 1" thickness.
- The default strike centerline is 40-5/16" from floor. Unless specified, existing door stop is assumed to be 5/8" high.

# SPECIAL-LITE, INC. **SL-17 FRP Flush Door** Estimate/Order Form

1. Door Mark: \_\_\_\_\_

2. Quantity: \_\_\_\_\_  Singles  Pairs

3. Aluminum Finish: (check one)

- Clear Anodize  Dark Bronze Anodize  Black Anodize  
 Special Anodize \_\_\_\_\_  
 Painted \_\_\_\_\_ (Provide Code or Sample)

4. Face Sheet Material:

Int. Ext. Standard FRP SpecLite 3® Colors

- Sandstone  
  Beige  
  Light Grey  
  Military Blue  
  Dark Bronze  
  Hartford Green  
  Slate Grey  
  Seawolf  
  Boysenberry  
  Painted \_\_\_\_\_ (Provide Code or Sample)

**Classic FRP SpecLite 3® Colors**

- White FRP  
 Blue FRP  
 Dark Grey FRP  
 Black FRP  
 Red FRP

5. Frames by Special-Lite: (check one)  None

Provide any existing hardware locations to match. Glass not supplied by Special-Lite for framing.

**Panels**

- By S-L  By Others  1/4"  1"

**Storefront Frames**

- 1-3/4" x 4-1/2"  2" x 4-1/2"  2" x 6"  
 Non-Thermally Impr'v'd Thermally Impr'v'd Thermally Impr'v'd


**Heavy Wall Flush Glazed Frames**

- 1-3/4" x 4-1/2"  2" x 4-1/2"  2" x 6"  
 Non-Thermally Impr'v'd Thermally Impr'v'd Thermally Impr'v'd

**Heavy Wall Tube Frames with Applied Stops**

- 1/4"  1" Provide glass thickness for transom/side lite.

- 2" x 4"  1-3/4" x 4"  5/8" x 4-1/2"  
 2" x 4-1/2"  1-3/4" x 4-1/2"  1" x 4-1/2"  
 2" x 5"  1-3/4" x 5"  1" x 6"  
 2" x 6"  1-3/4" x 6"  1030 Insert Frame  
 Capping (Frame detail required)

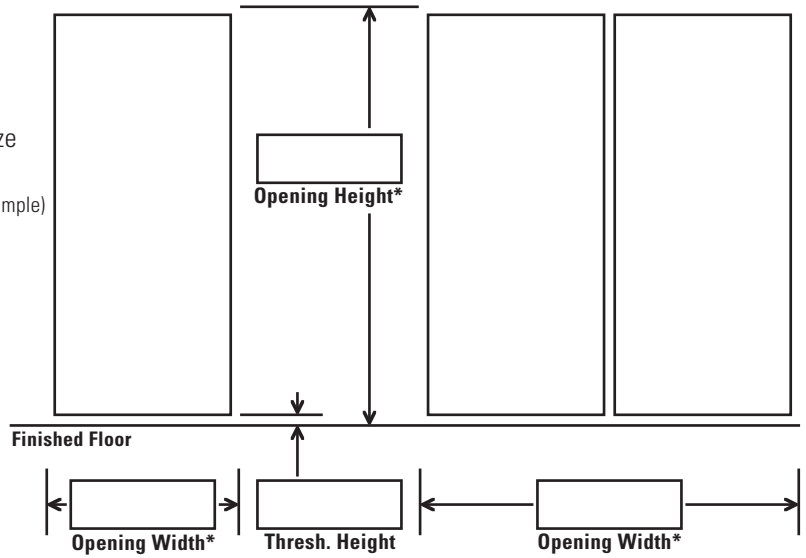

\*For both width and height, measure opening at several points and record the smallest dimension.


9. Opening Dimensions (Provide measurements above.)

Measure opening to finished floor

- Rough Opening (masonry opening)  Net Frame Size  Door Opening (jamb to jamb measurement)  
 Net Door Size

10. Swing:

Degree of Door Opening \_\_\_\_\_°

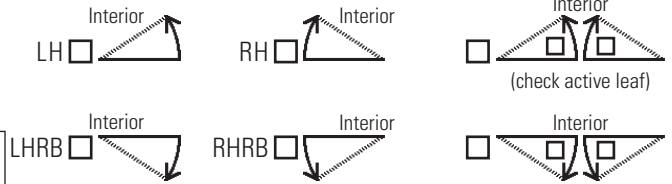

6. Hardware:

| Quantity | Manuf. | Item# | Size | Finish | Supplied By S-L          | Prep per Temp.           | Will be sent to S-L      |
|----------|--------|-------|------|--------|--------------------------|--------------------------|--------------------------|
|          |        |       |      |        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|          |        |       |      |        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|          |        |       |      |        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|          |        |       |      |        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|          |        |       |      |        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |
|          |        |       |      |        | <input type="checkbox"/> | <input type="checkbox"/> | <input type="checkbox"/> |

7. Vision Lite: (check one)  Other (provide sketch)

- 12" x 12"  Half Lite  Full Lite  
 Narrow Lite  Double Lite  No Lite  
 Half Lite with 9 Lite Aluminum Surface Muntins

8. Glass/Louvers for Doors:

- By S-L  By Others
- 1/4" Lexan MR10  
 1/4" Tempered Clear  
 1/4" Laminated Clear  
 1" Tempered Clear  
 Louver  w/Screen

Special Instructions: