

## Estimate / Order Cover Page

Date: \_\_\_\_ / \_\_\_\_ / \_\_\_\_

From:

Fax to Special-Lite, Inc.: (800) 423-7610

Pages including this one: \_\_\_\_\_

Estimate

Purchase Order: Your PO #: \_\_\_\_\_ Signature: \_\_\_\_\_

This job was estimated by Special-Lite. Please provide E#: \_\_\_\_\_

This job was estimated with the Satellite estimating program. Include Satellite estimate with P.O.

This job was estimated with the field price book

Special-Lite to provide Submission Drawings at additional cost

Contact: \_\_\_\_\_

Company: \_\_\_\_\_

Phone #: \_\_\_\_\_

Bill To: \_\_\_\_\_

Email: \_\_\_\_\_

Fax #: \_\_\_\_\_

Cell #: \_\_\_\_\_

Ship To: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

Use Ship To address on file with S-L

Freight:

Prepaid and added to invoice (Default)

Collect (not available if shipped to job site)

Third Party (bill to address on file with S-L)

Customer Pickup

All Product is shipped F.O.B. Decatur, MI

Please indicate when material is needed.

Date required for shipment: \_\_\_\_ / \_\_\_\_ / \_\_\_\_

Job Name: \_\_\_\_\_

Job Site Telephone #: \_\_\_\_\_

Job Site Contact Name: \_\_\_\_\_

Owner: \_\_\_\_\_

Architect: \_\_\_\_\_

Job Location Address: \_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

# Special-Lite, Inc.

## SL-21 Fire-Rated Door

### Estimate/Order Form Instructions

The numbers on this step-by-step guide correspond to the sections on the order form.

- 1 Door Mark:** Provide your door marking for labeling. The door mark will be labeled on doors, frames, and shipping boxes.
- 2 Quantity:** Specify the quantity of single doors or the quantity of pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.
- 3 Finish:** Edge capping and vision lite kits are natural (unfinished) stainless steel.
- 4 Facesheet Material/Color:** Choose the desired face sheet color from the supplied list. Face sheet options include SpecLite3® pebblegrain FRP or paintable pebblegrain face sheets. SpecLite3® FRP face sheet options include both the standard and classic color selections. For paintable face sheet material choose one of our 20 established paint colors for faster turnaround and lower cost.
- 5 Fire-Rated Framing:** Framing can be provided through Special-Lite (immediate door frame only) or by others. If provided through Special-Lite, indicate color and type of frame. When using 1030 Insert Frame with capping, please sketch frame detail for capping configuration. Aluminum Framing is available. Consult Special-Lite for applications.
- 6 Hardware:** Indicate any hardware item (and manufacturer) that Special-Lite will be providing, installing, or prepping for. Be sure to indicate if we are providing each item, or if it will be sent to us. Attach hardware schedule when possible. We do not prep for surface-mounted closers. Wire pulls, flat hardware, and some continuous hinges must be sent to our factory if we are to prep for them. Otherwise they must be prepped in the field.

#### Hardware Compatibility:

	USE	DON'T USE
<b>Single:</b>	Rim exit device Mortise lock Cylindrical lock Surface closer Butt hinges Continuous hinge Kick plate up to 16" in height	Hold open Concealed vertical rods
<b>Pairs:</b>	Rim exit devices with fire-rated mullion Surface closers Butt hinges Continuous hinges Kick plates up to 16" in height <b>Flush bolts &amp; Mortise locks - up to 60 minute rating</b> <b>Surface vertical rods - up to 60 minute rating</b>	Hold open Concealed vertical rods

- 7 Vision Lite:** Choose from the following standard vision lites — 4" x 25", 6" x 28", 10" x 10", 20" x 28". Vision lites must be fire-rated and can be supplied by Special-Lite or others. Vision Lite must be at least 6" from daylight opening to hardware.
- 8 Glass:** Indicate if glass is by Special-Lite for factory installation, or by others for field installation. We will fax glass sizes to you for glass by others. Ceramic glass must be used in vision lites over 100 sq. inches.
- 9 Opening Dimensions:** Select "Door Opening" if you are using an existing frame, or a new frame by others. Door Opening height is measured from finished floor to the underside of the header. Do not measure to the top of an existing threshold. Maximum net door size is 48" x 96". Net frame size is measured from frame tip to frame tip. Indicate threshold height — default bottom undercut is 3/4".
- 10 Swing:** Indicate the proper swing of door. The top row consists of inswing doors. The bottom row consists of outswing doors. For pairs of doors, indicate the active leaf by checking the correct box. The default for active leaf is RHR for outswing doors and LH for inswing doors.
- 11 Label:** Indicate fire label needed.

Special Instructions: No form could accommodate all of Special-Lite's options, but we have worked to create a form that will handle most situations. Use the Special Instructions area, or include a separate sheet to indicate any needs not addressed in the rest of the form.

#### Other Flush Door Notes:

- Surface closers are field prepped and installed.
- The default strike centerline is 40-5/16" from floor. Unless specified, existing door stop is assumed to be 5/8" high.

SPECIAL-LITE, INC. **SL-21 Fire-Rated Door** Estimate/Order Form


1. Door Mark: \_\_\_\_\_

2. Quantity: \_\_\_\_\_  Singles  Pairs

3. Edge Capping Finish: **Stainless Steel**

4. Face Sheet Material: **FRP Pebble Grain**

- |                          |                          |                      |
|--------------------------|--------------------------|----------------------|
| Exterior                 | Interior                 | <b>Through-Color</b> |
| <input type="checkbox"/> | <input type="checkbox"/> | Beige                |
| <input type="checkbox"/> | <input type="checkbox"/> | Boysenberry          |
| <input type="checkbox"/> | <input type="checkbox"/> | Hartford Green       |
| <input type="checkbox"/> | <input type="checkbox"/> | Light Grey           |
| <input type="checkbox"/> | <input type="checkbox"/> | Dark Bronze          |
| <input type="checkbox"/> | <input type="checkbox"/> | Military Blue        |
| <input type="checkbox"/> | <input type="checkbox"/> | Sandstone            |
| <input type="checkbox"/> | <input type="checkbox"/> | Seawolf              |
| <input type="checkbox"/> | <input type="checkbox"/> | Slate Grey           |
| <input type="checkbox"/> | <input type="checkbox"/> | Blue                 |
| <input type="checkbox"/> | <input type="checkbox"/> | Black                |
| <input type="checkbox"/> | <input type="checkbox"/> | Dark Grey            |
| <input type="checkbox"/> | <input type="checkbox"/> | Red                  |
| <input type="checkbox"/> | <input type="checkbox"/> | White                |
|                          |                          | <b>Painted</b>       |
| <input type="checkbox"/> | <input type="checkbox"/> | _____                |
| <input type="checkbox"/> | <input type="checkbox"/> | _____                |

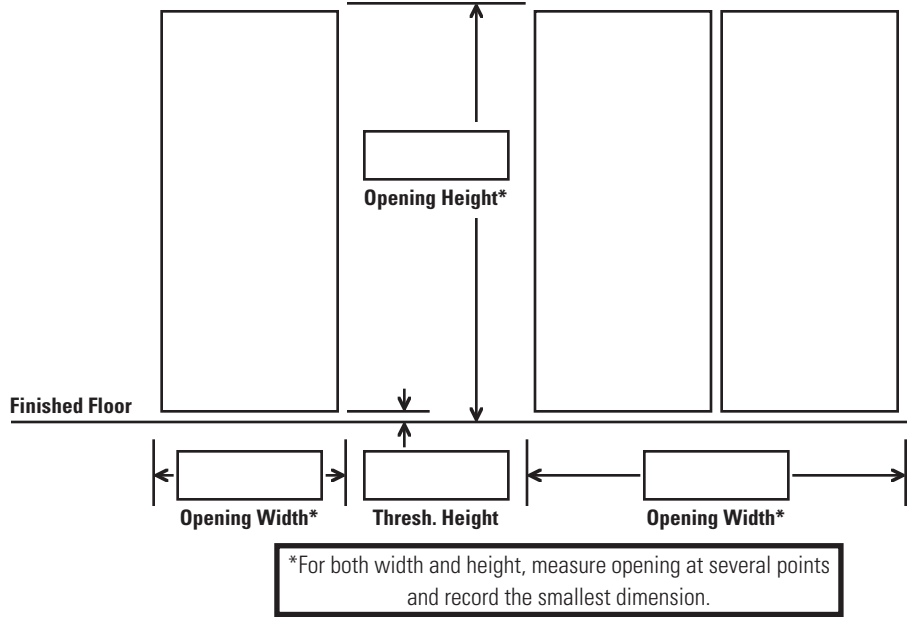

5. Fire-Rated Framing: (immediate door frame only)

By others

**Supplied by Special-Lite** D. Bronze Anod. Black Anod. Clear Anod.

1030 Insert Frame & Capping

Custom Color: \_\_\_\_\_

Hollow Metal Frame (primed only)

Aluminum Frame (consult Special-Lite)

6. Fire-Rated Hardware:

	By S-L	Prep per temp.	Will be sent to S-L
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

7. Stainless Steel Vision Lite: (check one)

- 4" x 25"\*  10" x 10"\*
- 6" x 28"  20" x 28" \*can be wire glass or ceramic

8. Glass: **By S-L** **By Others**


- 3/16" NGP FireLite Premium NT (ceramic)
- 1/4" Fire-Rated Wire Glass up to 100 sq. in.

9. Opening Dimensions (Provide measurements above. Measure opening to finished floor — Max. Net Door Size 48" x 96".)

- Door Opening  Net Door Size  Net Frame Size

10. Swing:

Degree of Door Opening \_\_\_\_\_°

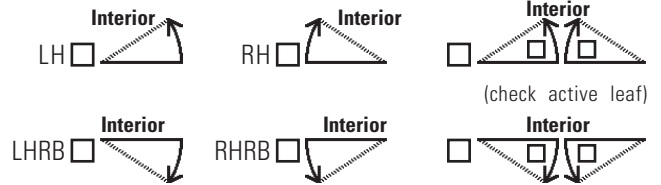

11. Label: (check one)

- 30 minute  45 minute
- 60 minute  90 minute

**Special Instructions/Drawing Area:**