

Estimate / Order Cover Page

Date: ____ / ____ / ____

From:

Fax to Special-Lite, Inc.: (800) 423-7610

Pages including this one: _____

<input type="checkbox"/> Estimate	
<input type="checkbox"/> Purchase Order: Your PO #: _____ Signature: _____	
<input type="checkbox"/> This job was estimated by Special-Lite. Please provide E#: _____	
<input type="checkbox"/> This job was estimated with the Satellite estimating program. Include Satellite estimate with P.O.	
<input type="checkbox"/> This job was estimated with the field price book	
<hr/>	
<input type="checkbox"/> Special-Lite to provide Submission Drawings at additional cost	
<hr/>	
Contact: _____	
Company: _____	Email: _____
Phone #: _____	Fax #: _____
Bill To: _____	Cell #: _____

Ship To: _____	Freight:
_____	<input type="checkbox"/> Prepaid and added to invoice (Default)
_____	<input type="checkbox"/> Collect (not available if shipped to job site)
_____	<input type="checkbox"/> Third Party (bill to address on file with S-L)
_____	<input type="checkbox"/> Customer Pickup
<input type="checkbox"/> Use Ship To address on file with S-L	All Product is shipped F.O.B. Decatur, MI
<hr/>	
Please indicate when material is needed.	
Date required for shipment: ____ / ____ / ____	
<hr/>	
Job Name: _____	Job Location Address: _____
Job Site Telephone #: _____	_____
Job Site Contact Name: _____	_____
Owner: _____	_____
Architect: _____	_____

Special-Lite, Inc.

SL-22 Fire-Rated Door

Estimate/Order Form Instructions

The numbers on this step-by-step guide correspond to the sections on the order form.

- 1 Door Mark:** Provide your door marking for labeling. The door mark will be labeled on doors, frames, and shipping boxes.
- 2 Quantity:** Specify the quantity of single doors or the quantity of pairs of doors required. All doors on each sheet must be identical. Use separate sheets for doors with differences.
- 3 Finish:** Edge capping and vision lite kits are natural (unfinished) stainless steel.
- 4 Facesheet Material/Color:** Choose the desired face sheets from the supplied list that consists of our 20 established paint colors or one of our six standard stain colors for faster turnaround and lower cost. Face sheets are flush AMP Wood Grain.
- 5 Fire-Rated Framing:** Framing can be provided through Special-Lite (immediate door frame only) or by others. If provided through Special-Lite, indicate color and type of frame. When using 1030 Insert Frame with capping, please sketch frame detail for capping configuration. Aluminum Framing is available. Consult Special-Lite for applications.
- 6 Hardware:** Indicate any hardware item (and manufacturer) that Special-Lite will be providing, installing, or prepping for. Be sure to indicate if we are providing each item, or if it will be sent to us. Attach hardware schedule when possible. We do not prep for surface-mounted closers. Wire pulls, flat hardware, and some continuous hinges must be sent to our factory if we are to prep for them. Otherwise they must be prepped in the field.

Hardware Compatibility:

	USE	DON'T USE
Single:	Rim exit device Mortise lock Cylindrical lock Surface closer Butt hinges Continuous hinge Kick plate up to 16" in height	Hold open Concealed vertical rods
Pairs:	Rim exit devices with fire-rated mullion Surface closers Butt hinges Continuous hinges Kick plates up to 16" in height Flush bolts & Mortise locks - up to 60 minute rating Surface vertical rods - up to 60 minute rating	Hold open Concealed vertical rods

- 7 Vision Lite:** Choose from the following standard vision lites — 4" x 25", 6" x 28", 10" x 10", 20" x 28". Vision lites must be fire-rated and can be supplied by Special-Lite or others. Vision Lite must be at least 6" from daylight opening to hardware.
- 8 Glass:** Indicate if glass is by Special-Lite for factory installation, or by others for field installation. We will fax glass sizes to you for glass by others. Ceramic glass must be used in vision lites over 100 sq. inches.
- 9 Opening Dimensions:** Select "Door Opening" if you are using an existing frame, or a new frame by others. Door Opening height is measured from finished floor to the underside of the header. Do not measure to the top of an existing threshold. Maximum net door size is 48" x 96". Net frame size is measured from frame tip to frame tip. Indicate threshold height — default bottom undercut is 3/4".
- 10 Swing:** Indicate the proper swing of door. The top row consists of inswing doors. The bottom row consists of outswing doors. For pairs of doors, indicate the active leaf by checking the correct box. The default for active leaf is RHR for outswing doors and LH for inswing doors.
- 11 Label:** Indicate fire label needed.

Special Instructions: No form could accommodate all of Special-Lite's options, but we have worked to create a form that will handle most situations. Use the Special Instructions area, or include a separate sheet to indicate any needs not addressed in the rest of the form.

Other Flush Door Notes:

- Surface closers are field prepped and installed.
- The default strike centerline is 40-5/16" from floor. Unless specified, existing door stop is assumed to be 5/8" high.

SPECIAL-LITE, INC. **SL-22 Fire-Rated Door** Estimate/Order Form


1. Door Mark: _____

2. Quantity: _____ Singles Pairs

3. Edge Capping Finish: **Stainless Steel**

4. Face Sheet Material: **AMP Wood Grain** (painted or stained)

- | | | | | | |
|--------------------------|--------------------------|-------------------------------------|--------------------------|--------------------------|------------------|
| <input type="checkbox"/> | <input type="checkbox"/> | Sandstone | <input type="checkbox"/> | <input type="checkbox"/> | Slate Grey |
| <input type="checkbox"/> | <input type="checkbox"/> | Patina Green | <input type="checkbox"/> | <input type="checkbox"/> | River Rouge Red |
| <input type="checkbox"/> | <input type="checkbox"/> | Bone White | <input type="checkbox"/> | <input type="checkbox"/> | Dark Bronze |
| <input type="checkbox"/> | <input type="checkbox"/> | Light Grey | <input type="checkbox"/> | <input type="checkbox"/> | Hartford Green |
| <input type="checkbox"/> | <input type="checkbox"/> | Coral | <input type="checkbox"/> | <input type="checkbox"/> | Blue |
| <input type="checkbox"/> | <input type="checkbox"/> | Pueblo Tan | <input type="checkbox"/> | <input type="checkbox"/> | Charcoal |
| <input type="checkbox"/> | <input type="checkbox"/> | Teal | <input type="checkbox"/> | <input type="checkbox"/> | Boysenberry..... |
| <input type="checkbox"/> | <input type="checkbox"/> | Black | <input type="checkbox"/> | <input type="checkbox"/> | Chestnut Stain |
| <input type="checkbox"/> | <input type="checkbox"/> | Seawolf | <input type="checkbox"/> | <input type="checkbox"/> | Dark Maple Stain |
| <input type="checkbox"/> | <input type="checkbox"/> | Brick Red | <input type="checkbox"/> | <input type="checkbox"/> | Mahogany Stain |
| <input type="checkbox"/> | <input type="checkbox"/> | Sage Brown | <input type="checkbox"/> | <input type="checkbox"/> | Oak Stain |
| <input type="checkbox"/> | <input type="checkbox"/> | Ivy Wall | <input type="checkbox"/> | <input type="checkbox"/> | Teak Stain |
| <input type="checkbox"/> | <input type="checkbox"/> | Military Blue | <input type="checkbox"/> | <input type="checkbox"/> | Walnut Stain |
| <input type="checkbox"/> | <input type="checkbox"/> | Custom Color (provide sample) _____ | | | |

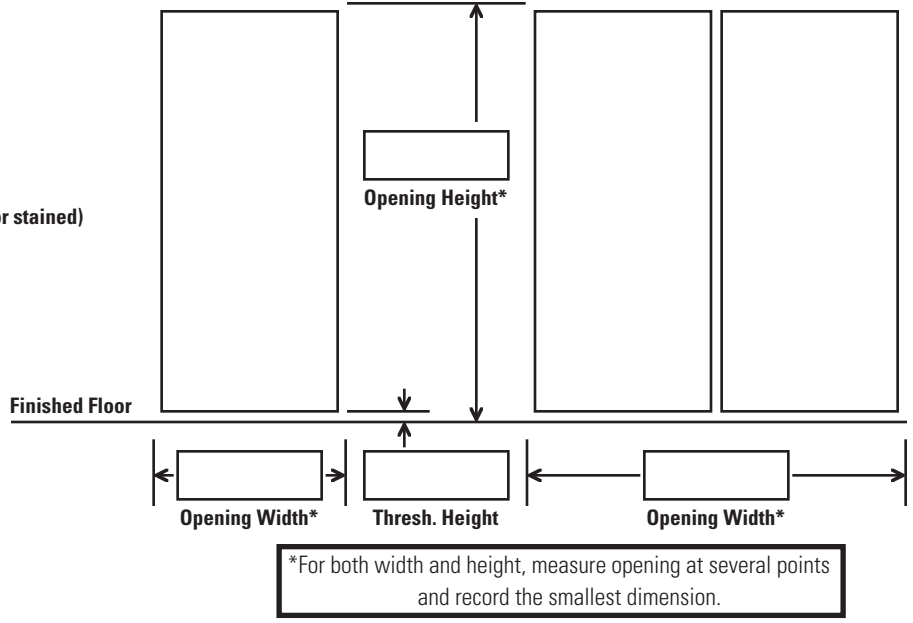

5. Fire-Rated Framing: (immediate door frame only)

By others

Supplied by Special-Lite D. Bronze Anod. Black Anod. Clear Anod.

- 1030 Insert Frame & Capping Custom Color: _____
- Hollow Metal Frame (primed only)
- Aluminum Frame (consult Special-Lite)

6. Fire-Rated Hardware:

	By S-L	Prep per temp.	Will be sent to S-L
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>
_____	<input type="checkbox"/>	<input type="checkbox"/>	<input type="checkbox"/>

7. Stainless Steel Vision Lite: (check one)

- 4" x 25"* 10" x 10"*
- 6" x 28" 20" x 28" *can be wire glass or ceramic

8. Glass: By S-L By Others


- 3/16" NGP FireLite Premium NT (ceramic)
- 1/4" Fire-Rated Wire Glass up to 100 sq. in.

9. Opening Dimensions (Provide measurements above. Measure opening to finished floor — Max. Net Door Size 48" x 96".)

- Door Opening Net Door Size Net Frame Size

10. Swing:

Degree of Door Opening _____°

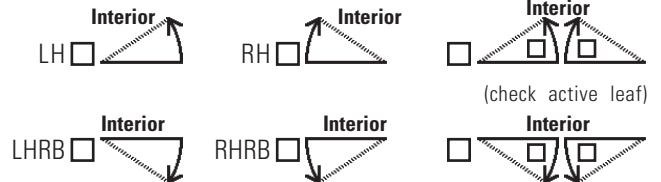

11. Label: (check one)

- 30 minute 45 minute
- 60 minute 90 minute

Special Instructions/Drawing Area: